


Gleitringdichtung Typ: ASP 052-TWLFU

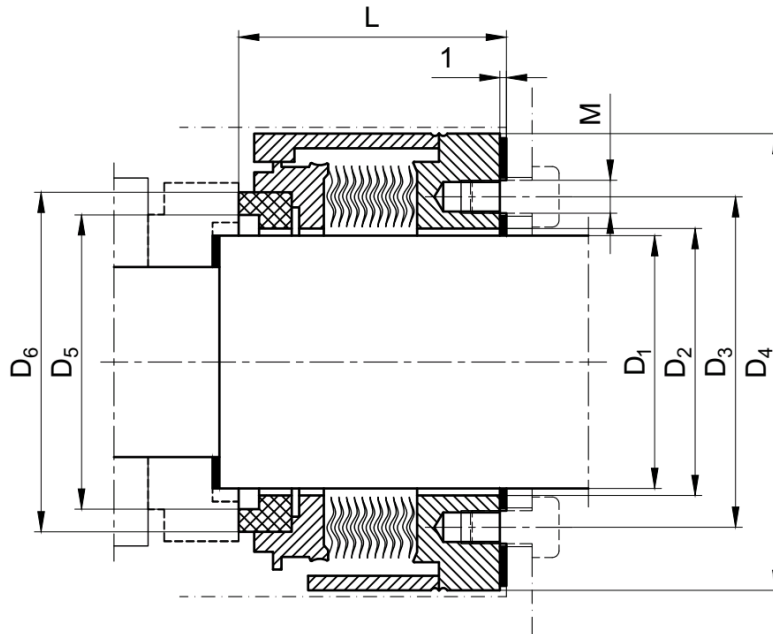

| D ₁ | D ₂ | D ₃ | D ₄ | D ₅ | D ₆ | L | M |
|----------------|----------------|----------------|----------------|----------------|----------------|------|------|
| 16-19 | 20.5 | 29 | 45 | 25.3 | 45 | 33.5 | 4xM4 |
| 20-24 | 25.5 | 35 | 49 | 33.8 | 49 | 33.5 | 4xM4 |
| 25-30 | 31.5 | 40 | 55 | 38.6 | 55 | 34.5 | 6xM4 |
| 31-35 | 36 | 45 | 59 | 40.8 | 59 | 33 | 6xM4 |
| 36-40 | 41 | 50 | 65 | 46.5 | 65 | 30.5 | 6xM4 |
| 41-45 | 46 | 55 | 69 | 50.2 | 69 | 35.5 | 6xM4 |
| 46-51 | 52 | 63 | 76.5 | 59.7 | 76.5 | 40.5 | 6xM5 |
| 52-60 | 61 | 70 | 84 | 65.6 | 84 | 32 | 6xM5 |
| 61-70 | 71 | 80 | 95 | 76.8 | 95 | 38 | 6xM5 |
| 71-82 | 83.5 | 95 | 112 | 92 | 112 | 41 | 6xM6 |
| 83-88 | 89.5 | 100 | 120 | 101.7 | 120 | 47 | 6xM6 |
| 89-100 | 101 | 112 | 130 | 106.7 | 130 | 47 | 6xM6 |

Angaben in mm

| Stückzahl | Wellendurchmesser | rotierender Teil, Typ: | Paarung |
|-----------|-------------------|------------------------|--|
| | | ASP 009-LFU | <input type="checkbox"/> Kohle / SiC <input type="checkbox"/> SiC / SiC <input type="checkbox"/> andere: |

Senden Sie dieses Formular an aspag@aspag-ag.ch und wir senden Ihnen ein Angebot zu.